

vizulo



STORK



Architectural & Landscape

Outdoor Industrial Area

Residential Street/Area

Ventilation cable gland

Combines pressure equalization and cable gland in a single unit. It ensures high air flow rates as well as high water protection capacity

Glass

Flat glass. Glass is fixed to die-cast aluminium frame with metal clips and can easily be replaced

LED module

High quality LED's with optimal thermal resistance and energy consumption characteristic, for high lumen output and long expected life time.

Available color temperature: 2700 K, 3000 K, 4000 K
(1800 K, 2200 K, 3500 K, 5000 K, 5700 K, 6500 K
available on customer request)

Sockets

Zhaga and NEMA sockets compatible

Protection

IP66 for the complete luminaire

Impact resistance

IK09 (Vandal protected) for the complete luminaire

Module temperature control

The LED driver will start reducing the light output when the LED's approach critical temperature. The temperature is measured via a sensor placed on the PCB

(function available on customer request)

Body

Die-cast aluminium

Lighting protection

Built-in surge protection starting from 3 kV till 10 kV

Light regulation

STORK drivers offer integrated midnight dimming and network-controlled 1-10 V and DALI protocols

Opening

Die-cast aluminium clip for tool-less opening or closing, fixed to the frame with stainless steel spring for easy maintenance

Safety switch

Safety switch disconnects power on opening




Traffic Roads

Pedestrian Roads

City Centre

Midnight dimming

Midnight dimming provides multi-stage night-time power reduction based on an internal timer referenced to the power on/off time. There is no need for an external control infrastructure. The unit automatically performs a dimming profile based on the predefined scheduled reference to the midpoint, which is calculated based on the power on/off times.

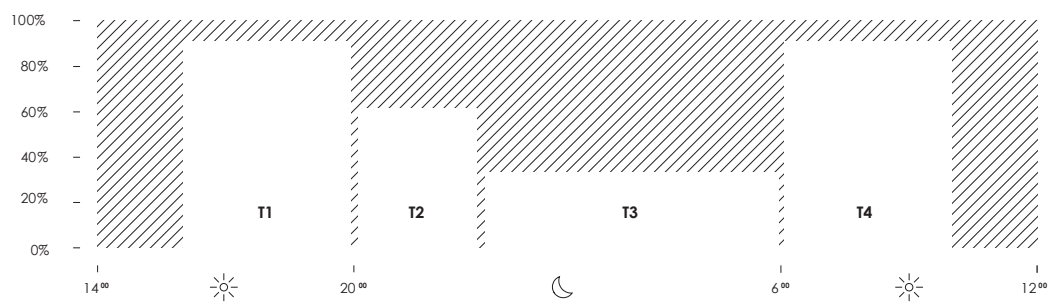

Stork



RAL7035



RAL9006




DB703




RAL9005


Other colors
available on request

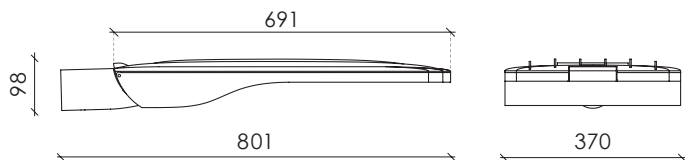


Dimensions with **60 mm console**




Dimensions with **2 Zhaga connectors**




Dimensions with **76 mm console**

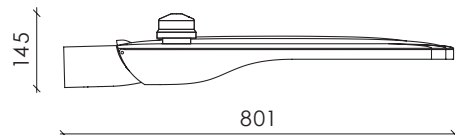




Dimensions with **NEMA socket**




Dimensions with **60 mm ±90° adjustable console**




Dimensions with **76 mm ±90° adjustable console**

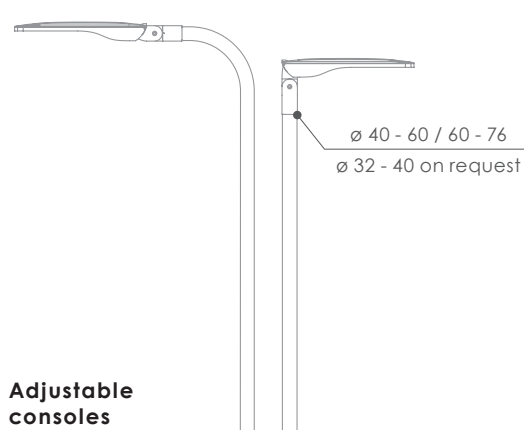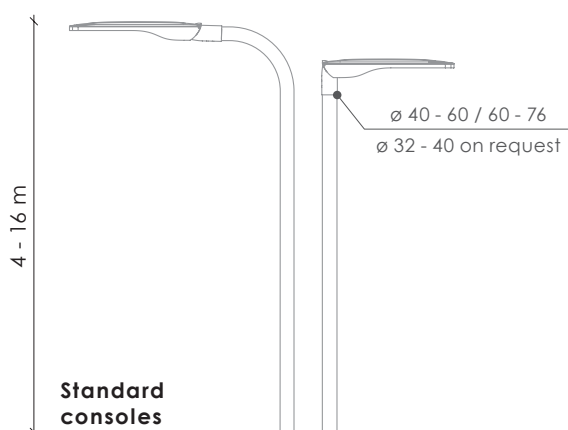


Console angle regulation




Horizontal entry
≤ -15° ... 0°




Vertical entry
≤ 0° ... 15°



Console angle regulation



Horizontal entry
± 90°



Vertical entry
± 90°

Note! Only those models with fixed mounting position (0° relative to the ground) are DarkSky approved!


Features

☒ WHITE OR BLACK PCB - PERFORMANCE MEETS AESTHETICS

Choose **white PCB** for brighter illumination, or the **black PCB** for a sleek, modern look.

While white PCB offer **~11%** more lumens, black PCB deliver just **2.5%** less light on the road - an impressive result given their design appeal.

Note! Black PCB available on request

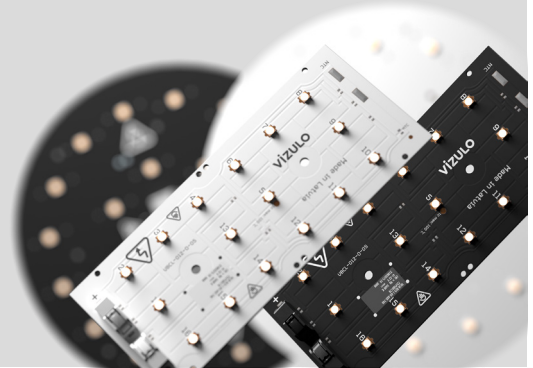

☒ 2 DESIGN OPTIONS

Choose between two thermal management designs to match your performance and aesthetic needs:

- **standard** (with cooling fins)
- **smooth** (without fins)



☒ 4 CONSOLE OPTIONS

Choose from four versatile console options to suit various pole types and installation angles:

- **ø 60 mm** standard or adjustable console for poles with **ø 40 - 60 mm**
- **ø 76 mm** standard or adjustable console for poles with **ø 60 - 76 mm**



☒ ZHAGA TOP AND BOTTOM

Connect up to 2 Zhaga Book 18 devices for motion detection and luminaire control



Technical information



V	198 - 264 / 110 - 277 ⁽¹⁾
Hz	50 - 60
W	5 - 315 standard 5 - 260 smooth
lm	555 - 48 200 ⁽²⁾ standard 555 - 40 670 ⁽²⁾ smooth
lm/W	Up to 161 ⁽³⁾
K	2700 / 3000 / 4000 ⁽⁴⁾
°C	-40 up to +55 ⁽⁵⁾
CRI	>70 / >80 / >90 ⁽⁴⁾

Body:	Die-cast aluminium
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming
Initial chromaticity:	MacAdam 5
Lifetime:	Eco 100 000 h (L90B10) at Ta = 25 °C* Standard 100 000 h (L98B10) at Ta = 25 °C* High density 100 000 h (L98B10) at Ta = 25 °C*
Warranty:	5 years
Installation:	Tool-less
Spigot:	32 - 40 mm ⁽⁶⁾ / 40 - 60 mm / 60 - 76 mm
Socket:	NEMA Top / Zhaga Top and Bottom
Intelligent Control:	Stand-alone / Group / CMS
Sensor:	Motion / Motion + Daylight / Daylight
Surge protection:	4 / 6 / 10 kV ⁽⁷⁾
Nature friendly:	PC Amber / Red / 1800 K
Corrosion protection:	Up to C5
Neto weight:	Up to 13.8 kg
Max. wind load area, SCd:	Up to 0.05 m ²

¹⁾ Maximum operating voltage, ENEC certificate voltage 198 - 264 V, UL certificate voltage 110 - 277 V

²⁾ Lumen output indicated at CRI > 70

³⁾ This value depends from configuration and can reach even higher number when max efficient components are combined

⁴⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

Note! Only fixtures with CCT of 3000 K or lower are DarkSky approved!

⁵⁾ Operating temperature differs depending on chosen output wattage

⁶⁾ Achievable with pole adapter from luminaire with ø 60 mm console to pole with ø 32 - 40 mm (on request)


⁷⁾ 10 kV (L-N; L/N-PE) surge protection device available on request

⁸⁾ EPD registration number: S-P-04347 ([link to page](#))

* This value is only informative and may change according to selected article. LED Lifetime is strongly depending from LEDs current and junction temperature – increase in LED current and luminaire power lead to increase of junction temperature and as consequence lifetime decrease. Thus, luminaire models with lower power, lower current (and lower junction temperature) will have higher lifetime than standard models. And high power and high current luminaire models may have negative lifetime deviation comparing to standard models. To receive precise value please contact VIZULO export representatives.

Technical parameters for final product can differ from typical data by 7% due to special conditions of LED manufacturing processes.

Model name principles

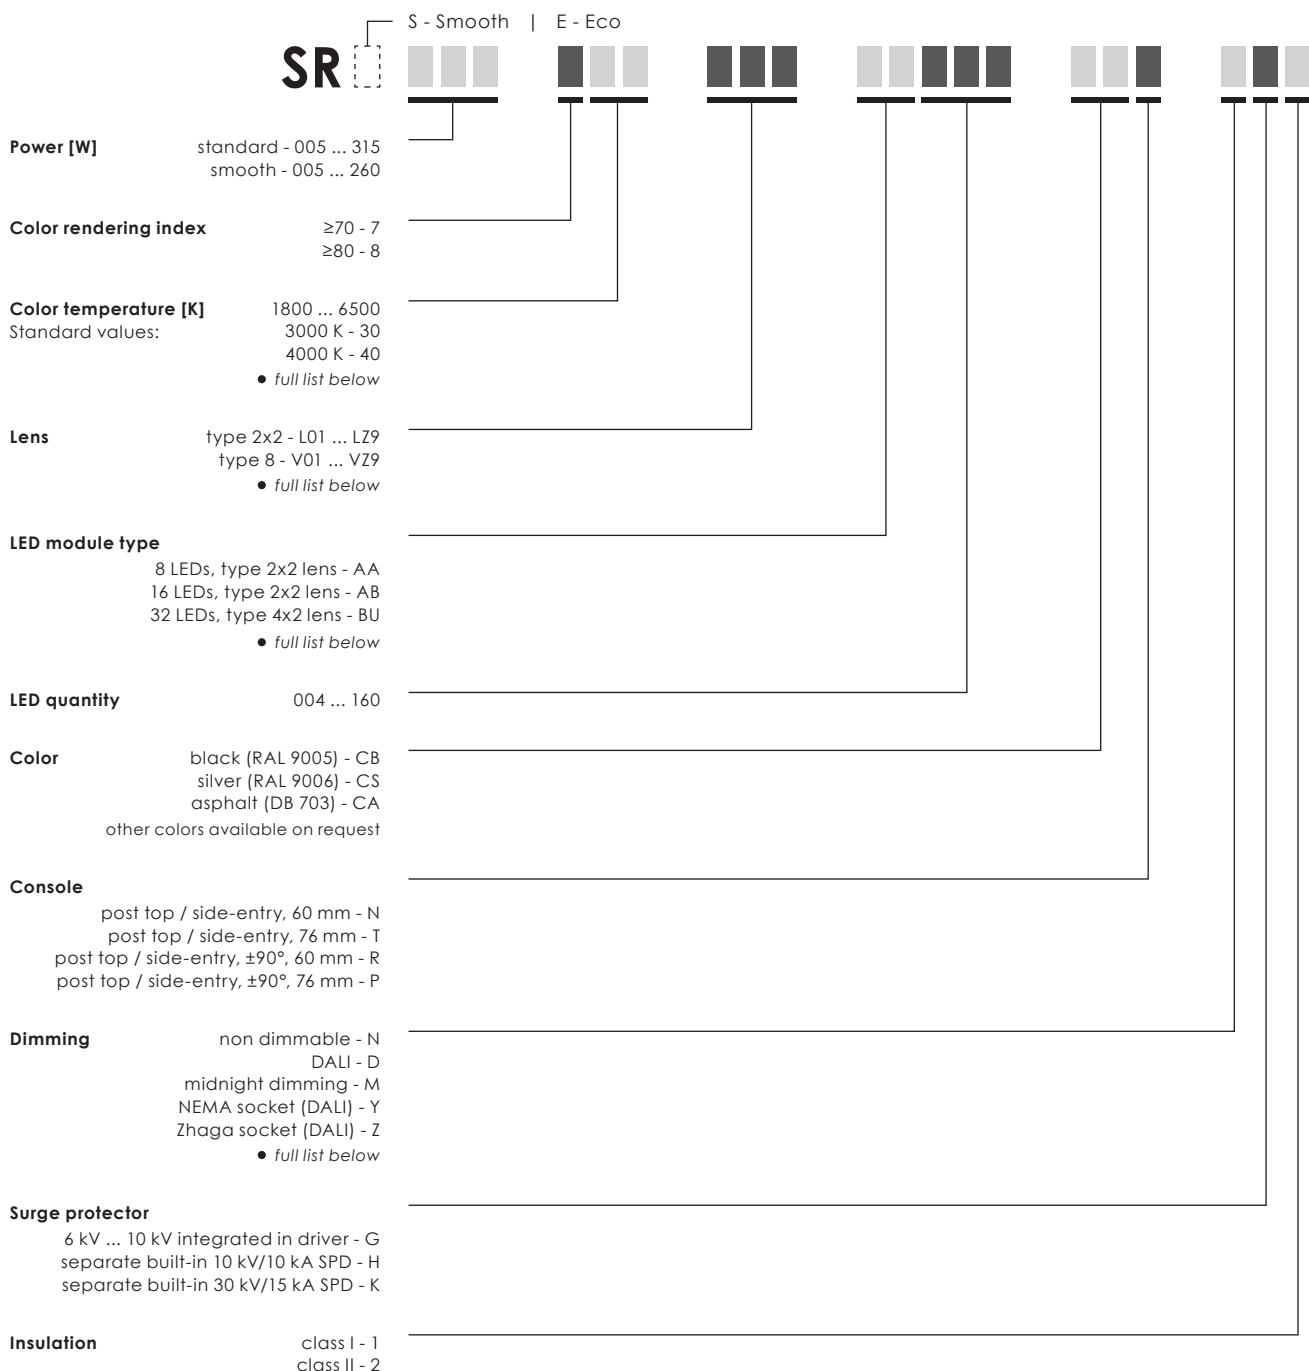

EXAMPLE SRE 280 740 BC5 BUI28 CAN DG1

• Full list of options

Color temperature [K]

1800 ... 6500
2700 K - 27
3000 K - 30
4000 K - 40
Nature Friendly Red - NR
Nature Friendly Amber - NA
Nature Friendly 1800 K - NK

Lens

type 8 - V01 ... VZ9
type 2x2 - L01 ... LZ9
type 2x3 - J01 ... JZ9
type 4x2 - B01 ... BZ9
custom configuration - M01 ... NZ9

LED module type

4 LEDs, type 2x2 lens - BG
8 LEDs, type 2x2 lens - AA
16 LEDs, type 2x2 lens - AB
12 LEDs, type 2x3 lens - BY
24 LEDs, type 2x3 lens - BZ
16 LEDs, type 4x2 lens - BT
32 LEDs, type 4x2 lens - BU
8 LEDs, type 8 lens - BH
16 LEDs, type 8 lens - AF
32 LEDs, type 8 lens - AG

Dimming


non dimmable - N
DALI - D
1-10 V - A
midnight dimming - M
midnight dimming + DALI - R
step dimming - S
mains dimming - L
wireless - W
NEMA socket (DALI) - Y
Zhaga socket (DALI) - Z
*custom configuration - X

* CUSTOM CONFIGURATION EXAMPLE

NEMA socket + Zhaga socket; NEMA socket + Zhaga socket + midnight dimming; etc.
Custom configuration information is available in order confirmation.

LED modules

Type	Max module QTY	Min LED QTY per module	Max LED QTY per module	Max LED QTY per luminaire	LED step	LED type	Lens type	LED module
AA	3	4	8	24	2	Standard Eco	type 2x2 L01...LZ9	
BY	3	6	12	36	6	Eco	type 2x3 J01...JZ9	
AF	3	4	16	48	2	Standard	type 8 V01...VZ9	
BT	3	4	16	48	8	Standard Eco	type 4x2 B01...BZ9	
AB	5	8	16	80	2	Standard Eco	type 2x2 L01...LZ9	
BZ	5	18	24	120	6	Eco	type 2x3 J01...JZ9	
AG	5	16	32	160	2	Standard	type 8 V01...VZ9	
BU	5	16	32	160	8	Standard Eco	type 4x2 B01...BZ9	

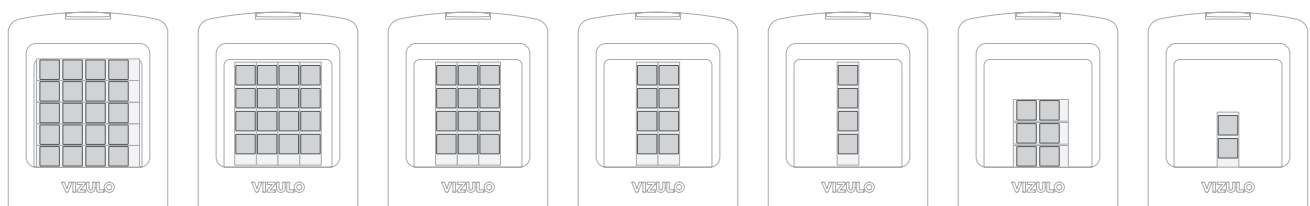

Cable core count

Socket	Dimming	Model number abbreviation	Input cable core count Class I	Input cable core count Class II
None	None	N	3	2
None	DALI	D	5	4
None	Midnight dimming	M	3	2
None	Midnight dimming + DALI	R	5	4
None	Step dimming	S	5 ⁽¹⁾	4 ⁽¹⁾
None	Mains dimming	L	3	2
Zhaga	DALI	Z	3 ⁽²⁾	2 ⁽²⁾
Zhaga	Midnight dimming	X	3	2
Zhaga	Mains dimming	X	3	2
NEMA	DALI	Y	3 / 5 ⁽³⁾	2 / 4 ⁽³⁾
NEMA	Midnight dimming	X	3	2
NEMA	Step dimming	X	5 ⁽¹⁾	4 ⁽¹⁾
NEMA	Mains dimming	X	3	2

¹⁾ 1 core unused

²⁾ DALI wires used only for internal connection between driver and Zhaga socket(s)

³⁾ +2 cores for external DALI connection

Cable order information*

* Custom cable lengths available on request





Cable length [m]	2 x 1.5 mm ²	3 x 1.5 mm ²	4 x 1.5 mm ²	5 x 1.5 mm ²
0.5	Art. 70100184	Art. 70100179	Art. 70100402	Art. 70100409
1	Art. 70100156	Art. 70100193	Art. 70000527	Art. 70100220
1.5	Art. 70100391	Art. 70100258	Art. 70100403	Art. 70100410
2	Art. 70100202	Art. 70100177	Art. 70000515	Art. 70100262
2.5	Art. 70100392	Art. 70100213	Art. 70100404	Art. 70100411
3	Art. 70100166	Art. 70100178	Art. 70000529	Art. 70100217
4	Art. 70100172	Art. 70100144	Art. 70000530	Art. 70100189
5	Art. 70100173	Art. 70100146	Art. 70000531	Art. 70100185
6	Art. 70100099	Art. 70000512	Art. 70000532	Art. 70000370
7	Art. 70100174	Art. 70100182	Art. 70000533	Art. 70100201
8	Art. 70100152	Art. 70000630	Art. 70000534	Art. 70100212
9	Art. 70100176	Art. 70000381	Art. 70000535	Art. 70100192
10	Art. 70100153	Art. 70000631	Art. 70000536	Art. 70000387
11	Art. 70100191	Art. 70100143	Art. 70000537	Art. 70000388
12	Art. 70100167	Art. 70100147	Art. 70000538	Art. 70100200
13	Art. 70100186	Art. 70100187	Art. 70000539	Art. 70100412
14	Art. 70100204	Art. 70100164	Art. 70000540	Art. 70100165
15	Art. 70100380	Art. 70100030	Art. 70000541	Art. 70100183
20	Art. 70100393	Art. 70100397	Art. 70100405	Art. 70100413
25	Art. 70100276	Art. 70100398	Art. 70100406	Art. 70100414



Optics

Type I



L06





L36





L43





L45





L46





L59





L61





L81





L94




V45




V57




Type II

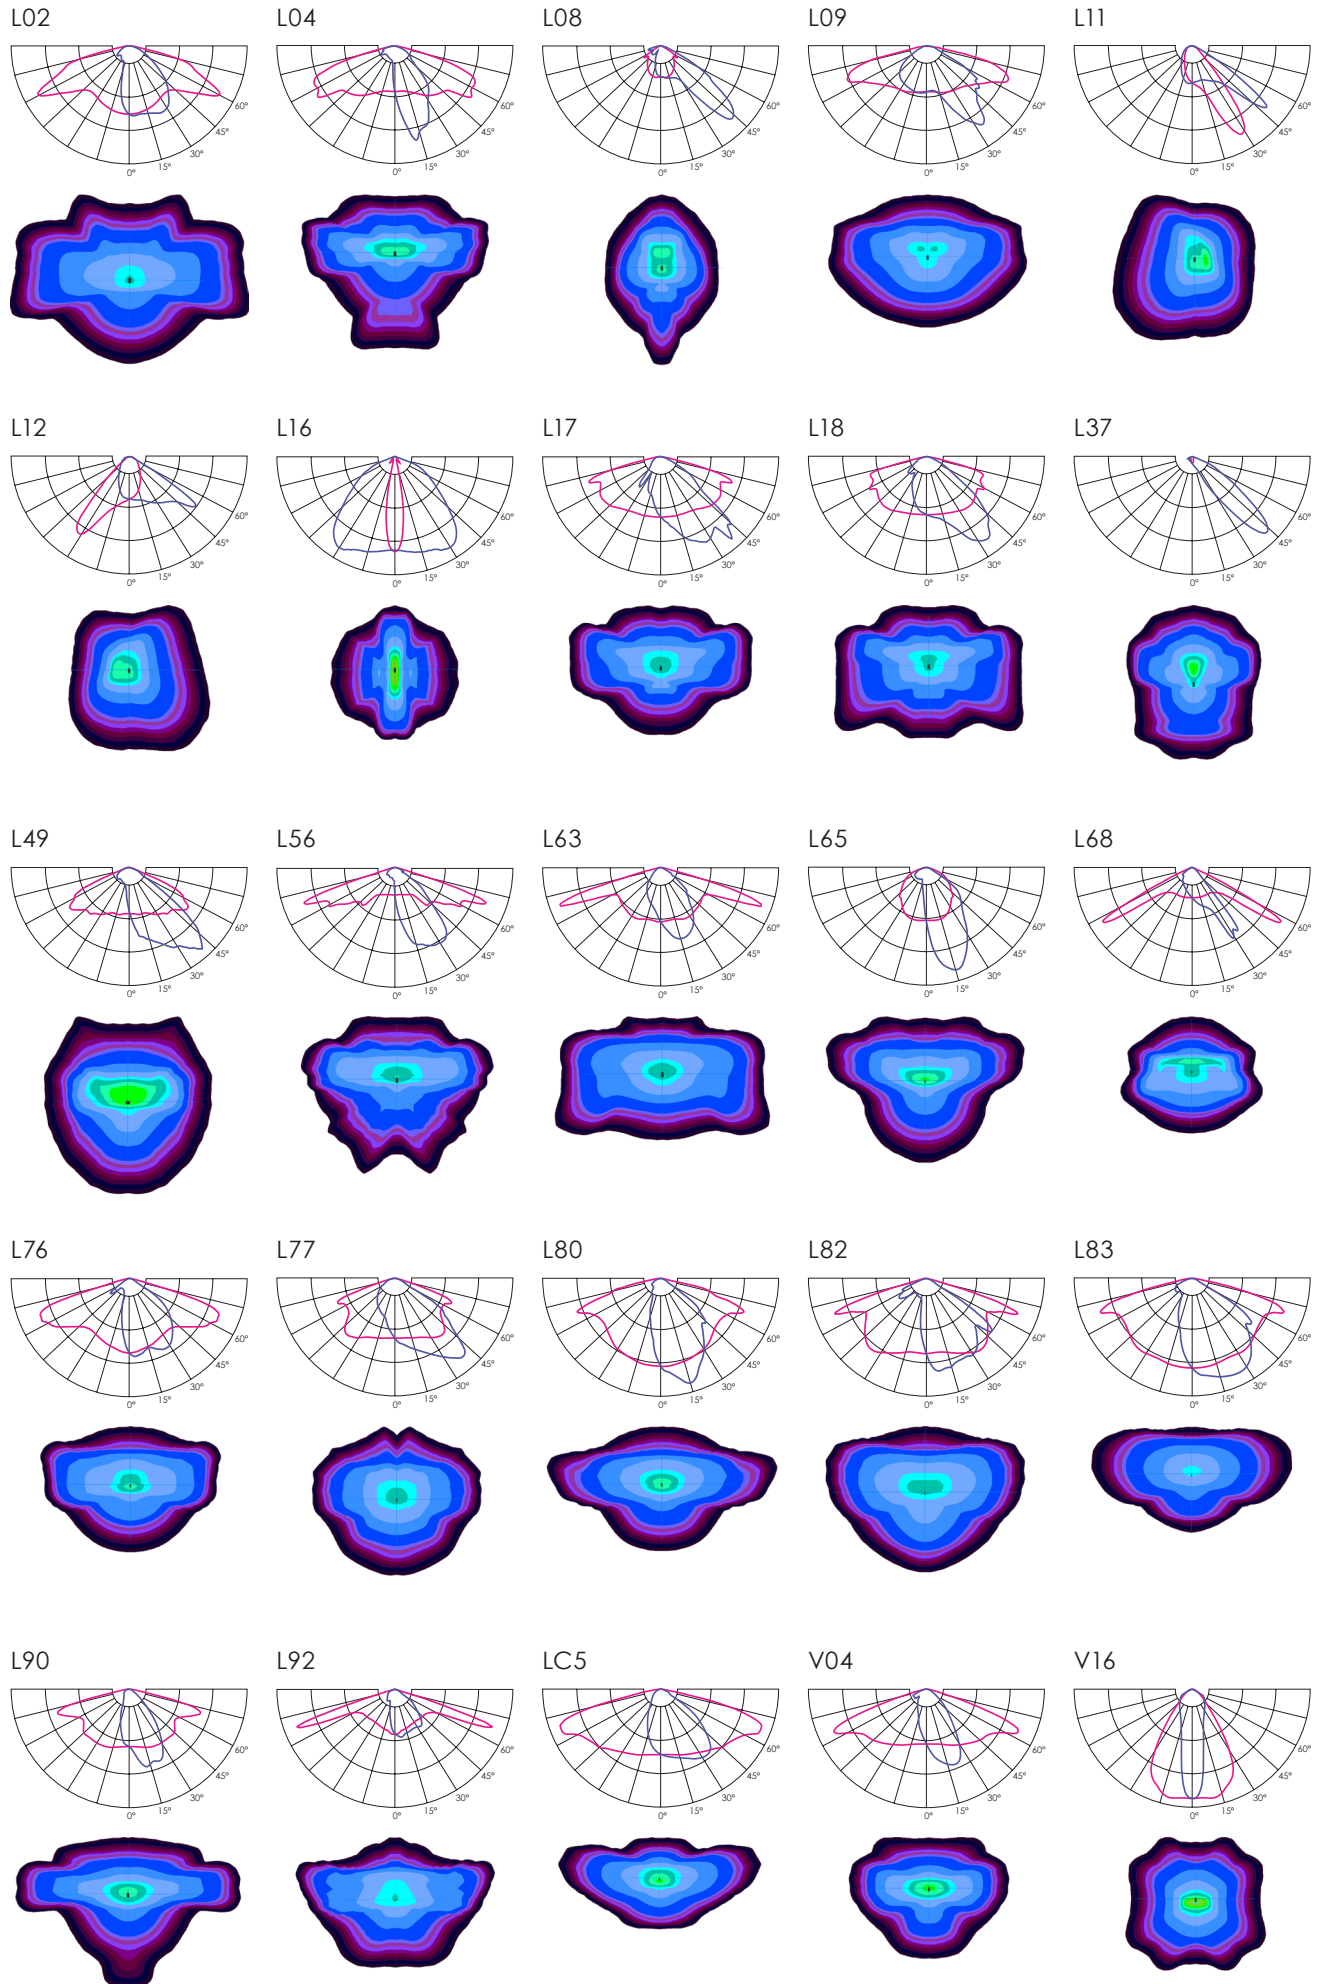


Type III

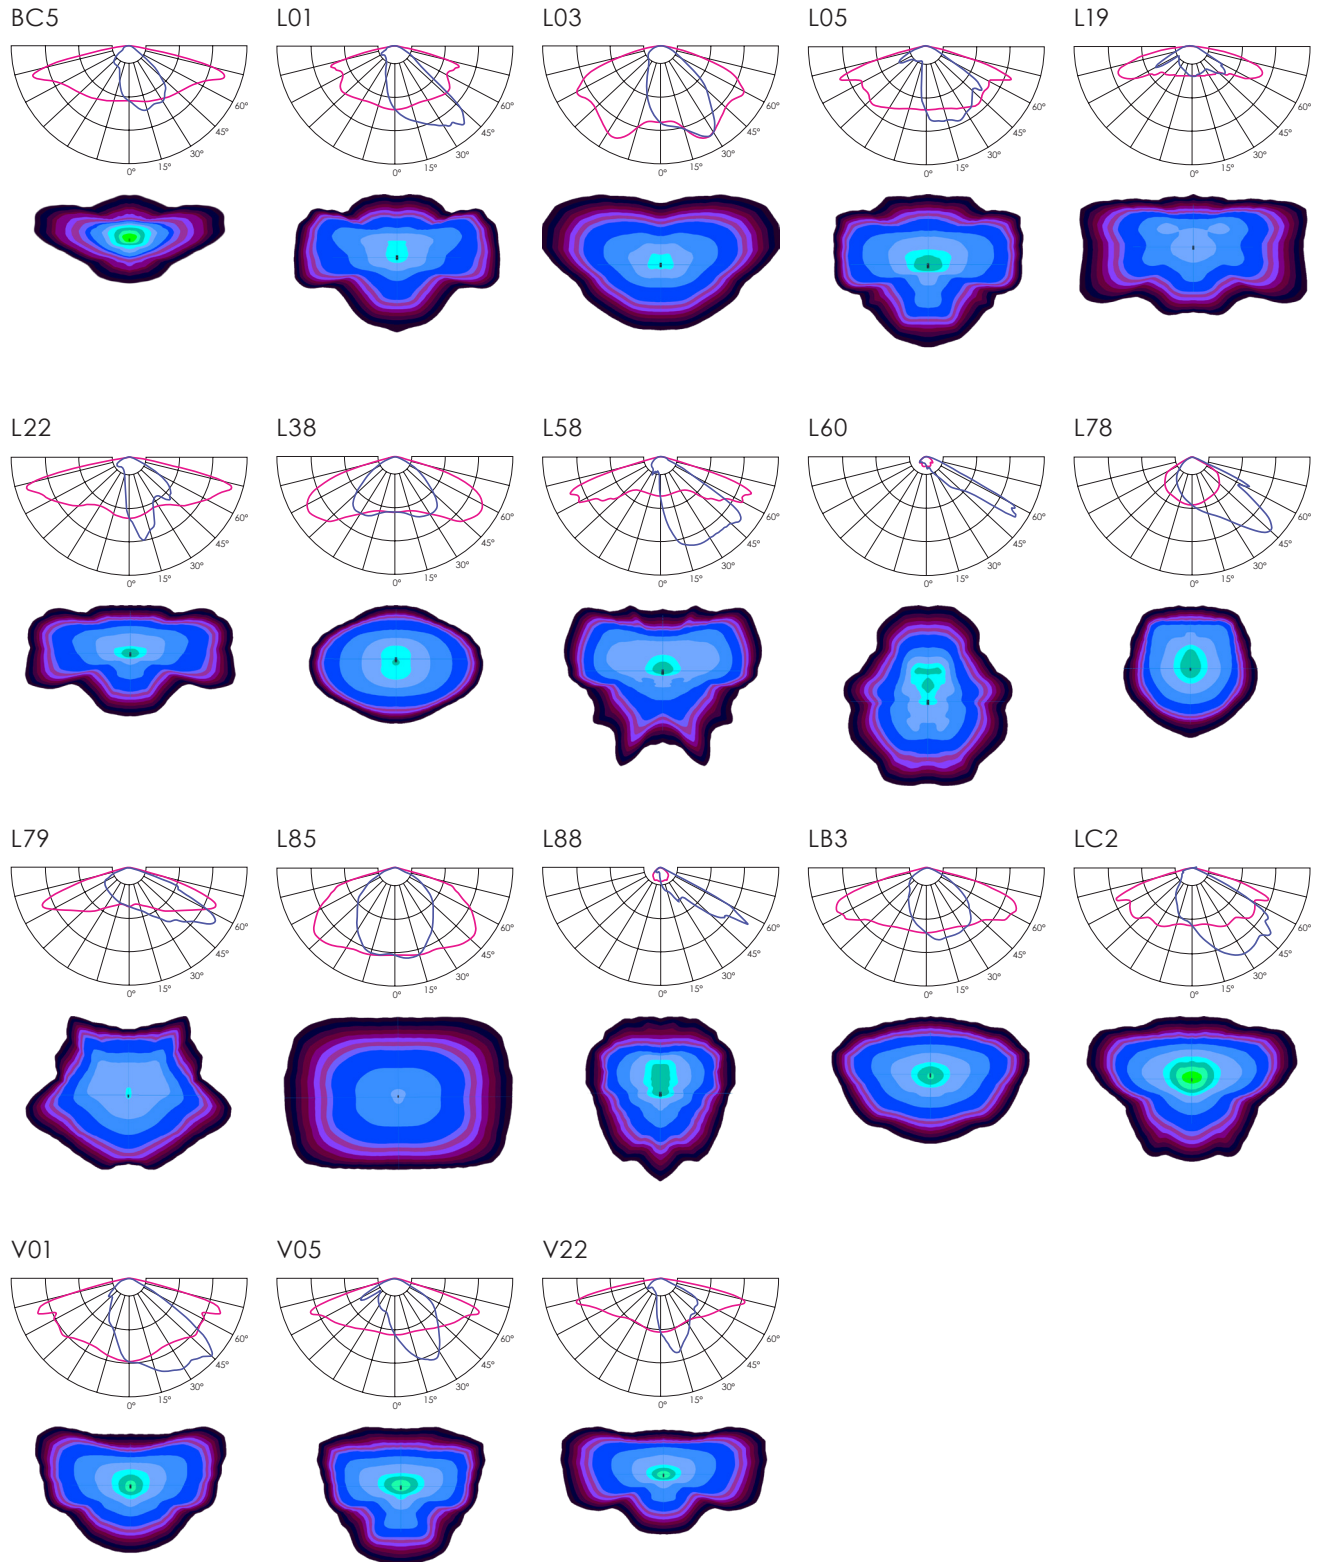

Type IV

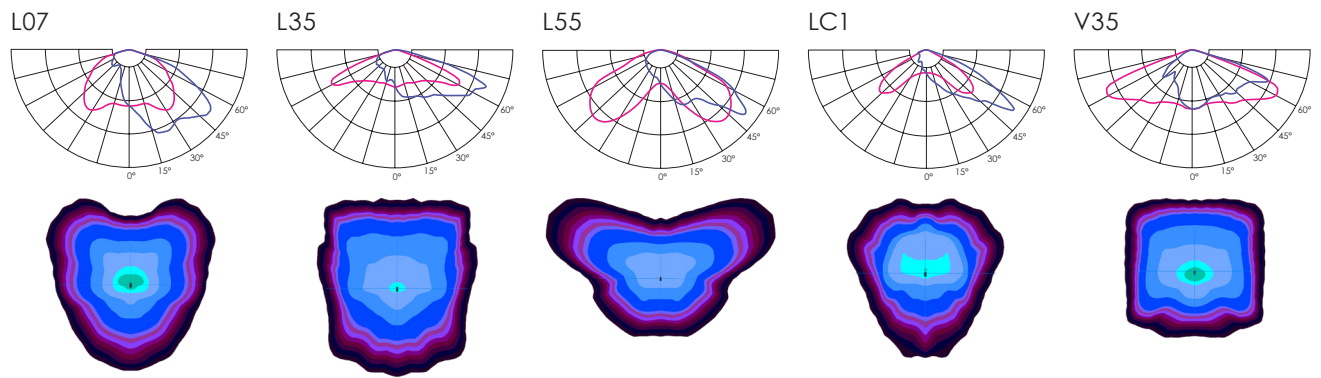

Type VS

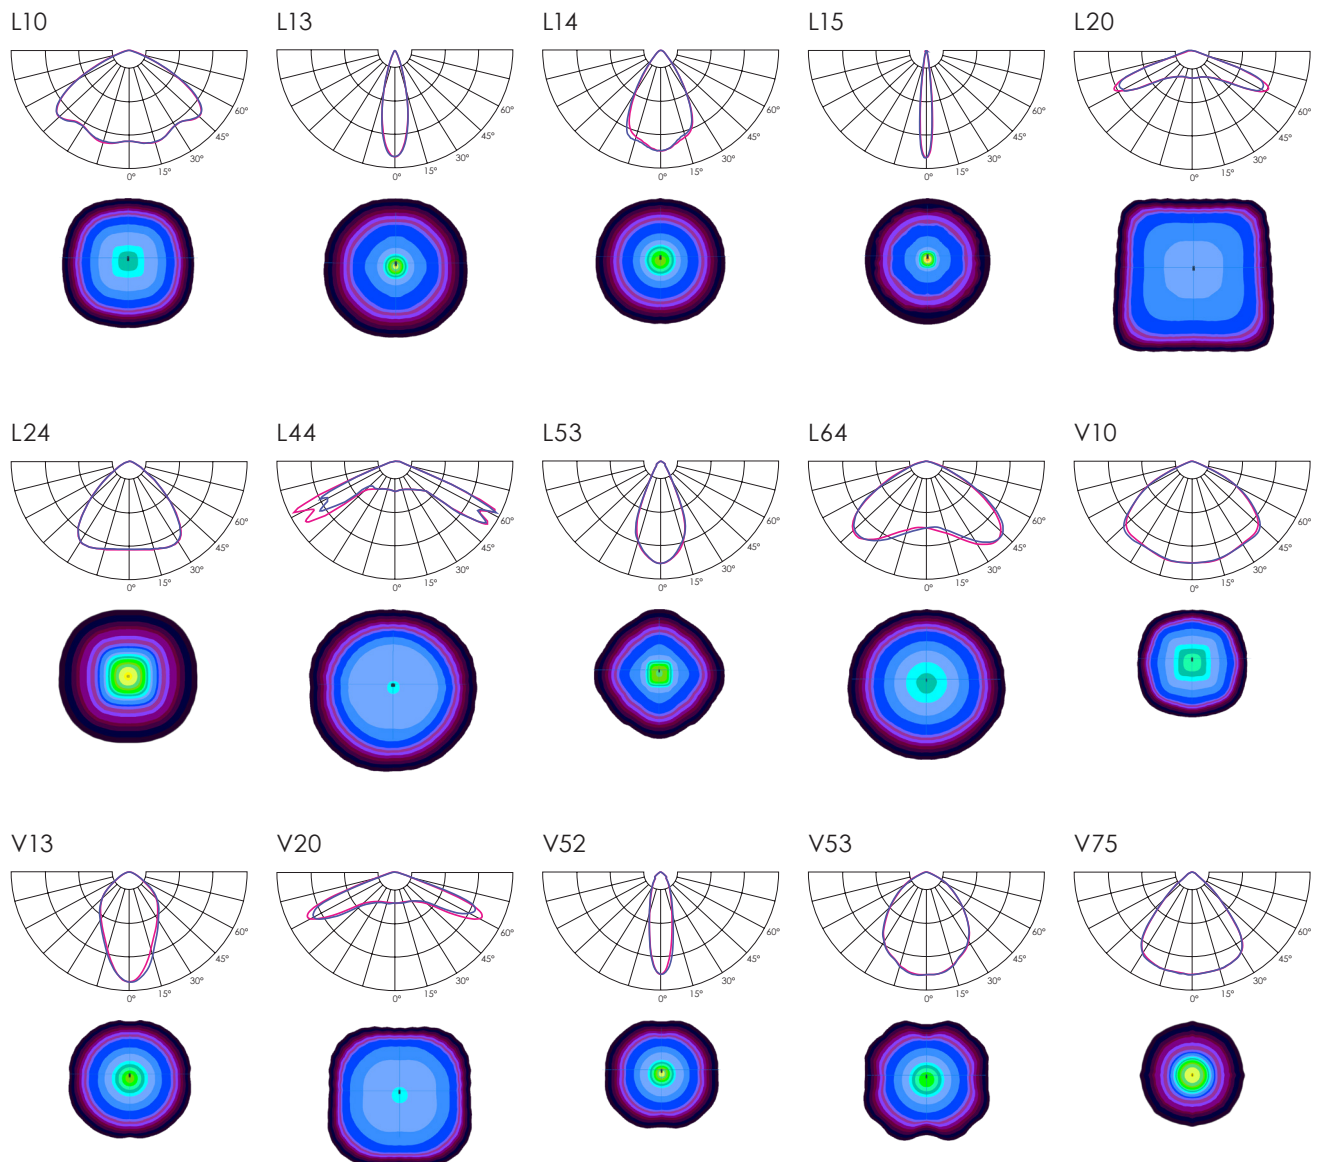



Pedestrian crossing optics



V	198 - 264 / 110 - 277 ¹⁾
Hz	50 - 60
W	5 - 190 ²⁾ / 12 - 280 ³⁾ standard 5 - 190 ²⁾ / 12 - 200 ³⁾ smooth
lm	Up to 26 600 ²⁾ / 26 600 ³⁾ standard Up to 35 600 ²⁾ / 27 600 ³⁾ smooth
lm/W	Up to 161 ⁴⁾
K	2700 / 3000 / 4000 ⁵⁾
°C	-40 up to +55 ⁶⁾
CRI	>70 / >80 / >90 ⁵⁾

Body:	Die-cast aluminium
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming
Initial chromaticity:	MacAdam 5
Lifetime:	Eco 100 000 h (L90B10) at Ta = 25 °C* Standard 100 000 h (L98B10) at Ta = 25 °C*
Warranty:	5 years
Installation:	Tool-less
Spigot:	32 - 40 mm ⁷⁾ / 40 - 60 mm / 60 - 76 mm
Socket:	NEMA Top / Zhaga Top and Bottom
Intelligent Control:	Stand-alone / Group / CMS
Sensor:	Motion / Motion + Daylight / Daylight
Surge protection:	4 / 6 / 10 kV ⁸⁾
Nature friendly:	PC Amber / Red / 1800 K
Corrosion protection:	Up to C5
Neto weight:	Up to 13.8 kg
Max. wind load area,	
SCd:	Up to 0.05 m ²

¹⁾ Maximum operating voltage, ENEC certificate voltage 198 - 264 V, UL certificate voltage 110 - 277 V

²⁾ Standard modules, lumen output indicated at CRI > 70

³⁾ Eco modules, lumen output indicated at CRI > 70

⁴⁾ This value depends from configuration and can reach even higher number when max efficient components are combined

⁵⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

Note! Only fixtures with CCT of 3000 K or lower are DarkSky approved!

⁶⁾ Operating temperature differs depending on chosen output wattage

⁷⁾ Achievable with pole adapter from luminaire with ø 60 mm console to pole with ø 32 - 40 mm (on request)


⁸⁾ 10 kV (L-N; L/N-PE) surge protection device available on request

⁹⁾ EPD registration number: S-P-04347 ([link to page](#))


* This value is only informative and may change according to selected article. LED Lifetime is strongly depending from LEDs current and junction temperature – increase in LED current and luminaire power lead to increase of junction temperature and as consequence lifetime decrease. Thus, luminaire models with lower power, lower current (and lower junction temperature) will have higher lifetime than standard models. And high power and high current luminaire models may have negative lifetime deviation comparing to standard models. To receive precise value please contact VIZULO export representatives.

Technical parameters for final product can differ from typical data by 7% due to special conditions of LED manufacturing processes.

Right side traffic

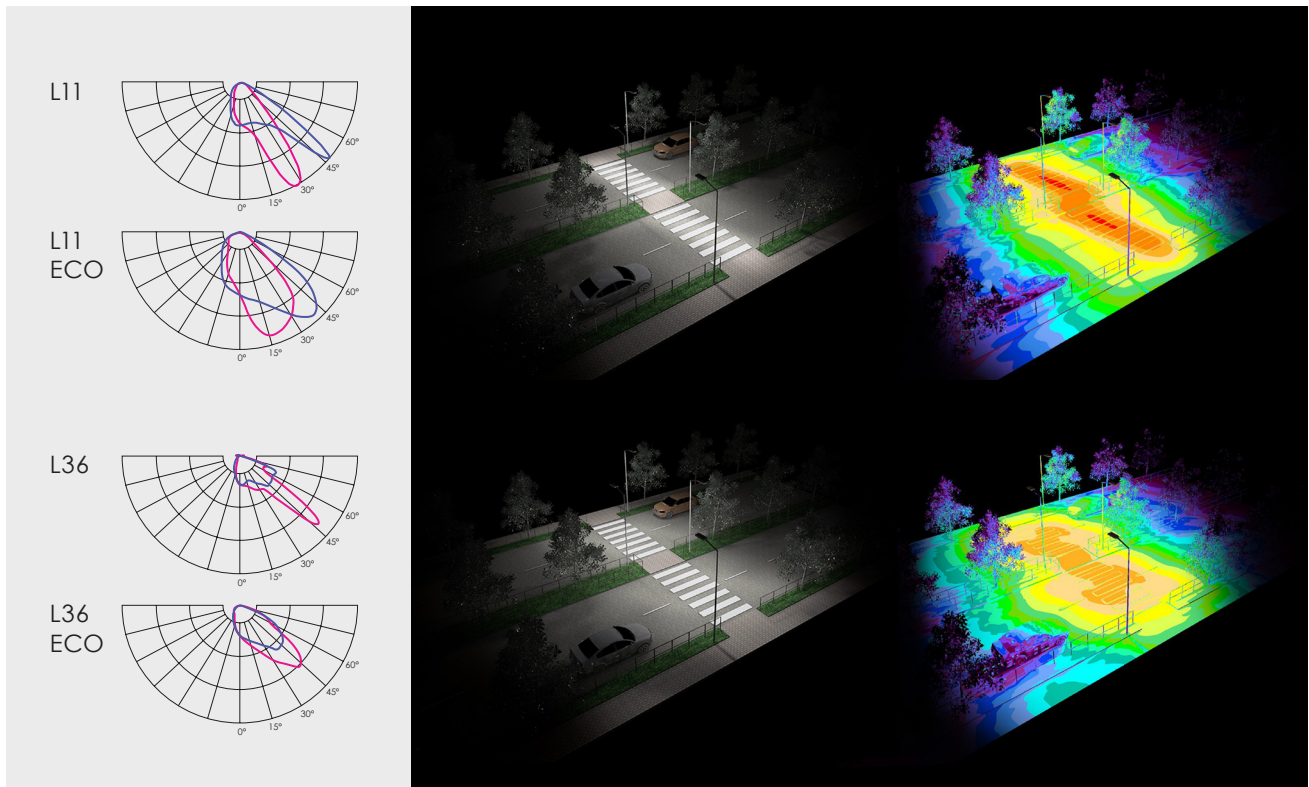


Left side traffic

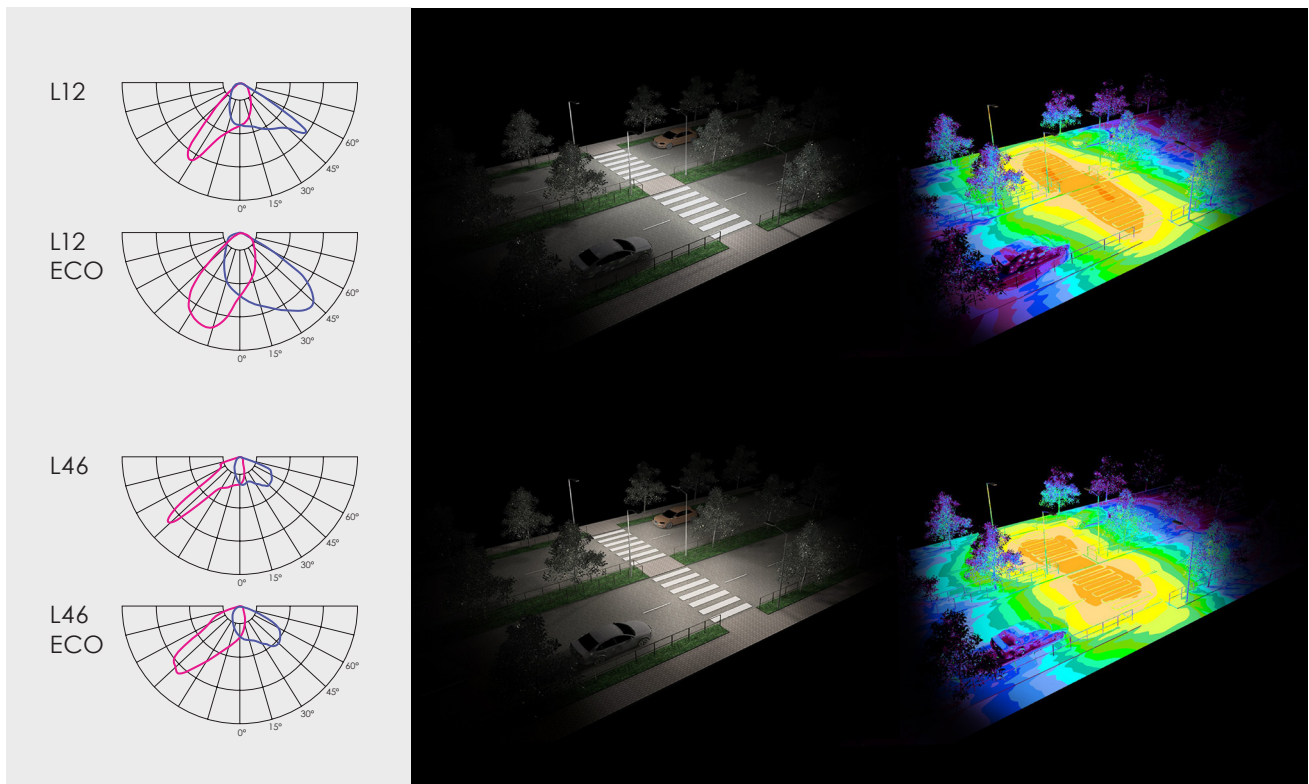

Backlight cutter


Backlight cutter | black

Art. 70000661

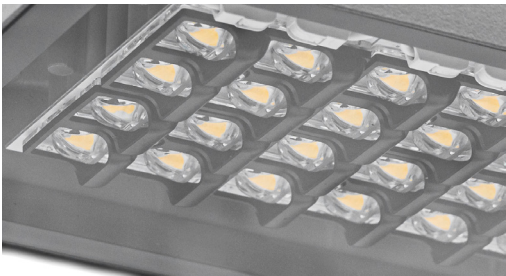


Backlight cutter | white

Art. 70000662

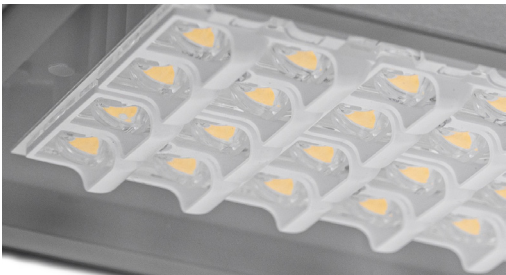


Optical losses from 10% to 31% depending from used optic.







Without backlight cutter



Backlight cutter | black



Backlight cutter | white

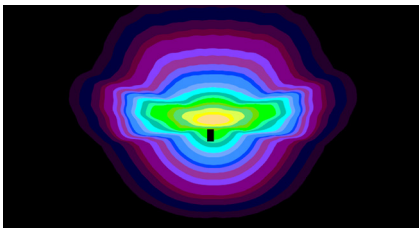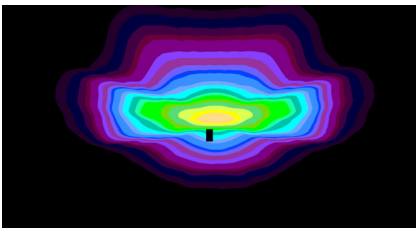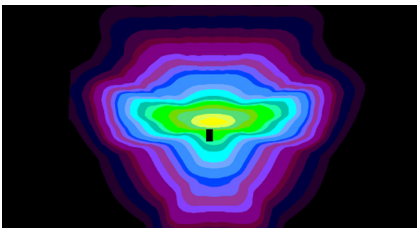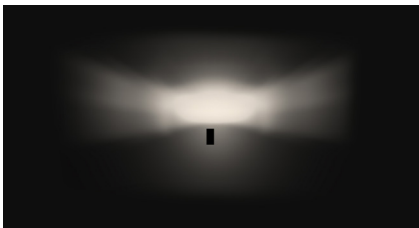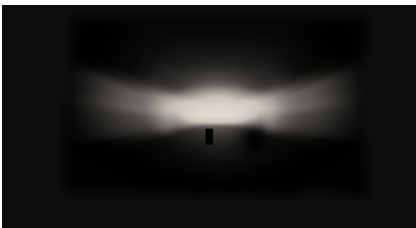


Accessories

NEMA Socket

operating temperature up to 105 °C

2213362-3, 5 pin NEMA socket Art. 70000362
2213362-4, 7 pin NEMA socket Art. 70000333




Dummy Link for NEMA Socket Art. 70000113



Zhaga Socket


with cap Art. 70000613
without cap Art. 70000612



Luminaire controller for Zhaga-standard connectors


ø 80 mm

MSLC205RG controller with radar Art. 70010027
MSLC205RGL controller Art. 70010029




IP68 rated wire cable connector

2 wire cable connector Art. 70000676
3 wire cable connector Art. 70000677
4 wire cable connector Art. 70000725
5 wire cable connector Art. 70000678



Console ø 76 mm


	RAL 7035	Art. 70044177
	RAL 9006	Art. 70044011
	DB 703	Art. 70044179
	RAL 9005	Art. 70044178



Adjustable console ø 60 mm

regulation angles $\pm 90^\circ$


	RAL 7035	Art. 70044012
	RAL 9006	Art. 70044080
	RAL 9005	Art. 70044141

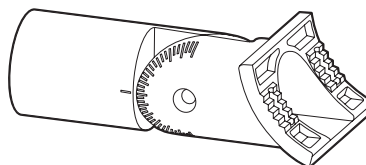

Adjustable console ø 76 mm

regulation angles $\pm 90^\circ$


	RAL 7035	Art. 70044176
	RAL 9006	Art. 70044013
	RAL 9005	Art. 70044142

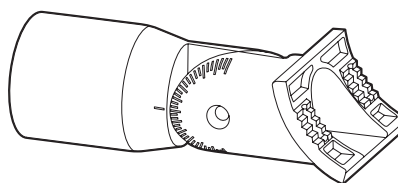

Horizontal wall / pole mounting bracket


for luminaire with ø 60 mm console
to pole with ø 60 mm

	RAL 9006	Art. 70000796
	RAL 9005	Art. 70000795




Pole adapter Art. 70044002

from luminaire with ø 60 mm console
to pole with ø 60 - 76 mm




Wall mounting bracket Art. 70044001

for luminaire with ø 60 mm console



Vertical wall mounting bracket Art. 70044004

for luminaire with ø 60 mm console



Certification



CE – conformity with European Union's health, safety and environmental protection standards

The CE mark is placed on products to state conformity with the relevant EU health, safety and environmental protection standards. In case of electronic products, the standards are, for example, the Restriction of Hazardous Substances in Electrical and Electronic Equipment (RoHS) directive, Waste Electrical and Electronic Equipment (WEEE) directive, the Electromagnetic Compatibility (EMC) directive etc. The mark ensures that the product can be sold anywhere in the European Economic Area (EEA).



UKCA - conformity with the relevant essential requirements of Great Britain

UKCA is a product mark intended to demonstrate compliance with the directives set by Great Britain (England, Scotland and Wales). It is analogous to the European Union's CE marking, meaning that depending on the type of product the applicable regulations are different. In case of LED lighting, the relevant requirements are compliance with the Electromagnetic Compatibility Regulations, the Electrical Equipment (Safety) Regulations, the Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations and the Ecodesign for Energy-Related Products and Energy Information (Lighting Products) Regulations.



EAC - compliance with the regulations of the Eurasian Customs Union

The EAC Mark demonstrates conformity with all technical regulations defined by the Eurasian Customs Union. The conformity is assessed by an accredited independent testing laboratory. The EAC marking is a requirement in order to place a product on the market of Russia and the Eurasian Economic Union.



RoHS – compliance with European Union's RoHS directive

The RoHS (Restriction of Hazardous Substances in Electrical and Electronic Equipment) directive restricts (with exceptions) the use of ten hazardous materials in the manufacture of various types of electronic and electrical equipment. The aim of the directive is to prevent the risks posed to human health and the environment related to the management of electronic and electrical waste.



Zhaga-D4i - compliance with the requirements of Zhaga Book 18 or 20 and DALI standard

The Zhaga-D4i Mark represents the fact that a product is certified following the Zhaga-D4i joint certification program – a program established by Zhaga and the DALI Alliance (DiiA). The Zhaga part of the Mark represents that a product meets the requirements of Zhaga Book 18 or 20 – Zhaga standards that describe a smart interface between outdoor luminaires and sensing/ communication nodes. The DALI Alliance part of the Mark signifies that the product conforms with the DALI standard for intelligent, IoT-ready luminaires.



UL - compliance with UL standards for LED lighting

UL stands for Underwriter Laboratories, a third-party certification company that's been around for over a century. UL sets industry-wide standards for products and performs testing according to these standards to ensure that the products marked with the UL mark are safe and high quality.



ENEC - compliance with European standards for electrical equipment

The ENEC Mark is the high quality European Mark for electrical equipment. It is governed by the European Testing Inspection Certification System which ensures that the testing of products is conducted at ENEC – accredited laboratories, following additional requirements regarding the testing procedures. The ENEC Mark means that the testing procedure was followed scrupulously and that the consumer can be certain of the product's safety and quality.



ENEC+ - compliance with European standards for LED – based electronic products

The ENEC+ Mark is the high quality European Mark for LED – based electronic products. It demonstrates the product's compliance with the IEC standards for performance of LED modules and LED based luminaires. The ENEC+ Mark can only be granted to a product that has already acquired the ENEC Mark.



DarkSky Approved - a DarkSky program seal of approval

DarkSky Approved certification is granted to outdoor lighting fixtures meeting the criteria outlined by DarkSky, an organization that aims to reduce light pollution, enabling clearer night skies and mitigating the impact on wildlife and human health. DarkSky Approved luminaires are shielded to cut off uplight, utilize energy-efficient light sources, and employ measures to limit glare. This certification reflects a dedication to responsible outdoor lighting, valued by communities, businesses, and individuals striving to protect nocturnal environments.



International EPD System – Environmental Product Declaration available

An Environmental Product Declaration (EPD) is a declaration of the materials, energy, transportation and other resources involved in the production, use and end-of life of a specific product. It is based on a Life Cycle Assessment (LCA) study that complies with standards EN ISO 14040 and EN ISO 14044. A product's EPD can help evaluate its impact on the environment and make sustainable choices.



Synergrid approved - compliance with Synergrid requirements for LED lighting

Synergrid is a federation of electricity and natural gas network operators in Belgium. The Synergrid approval mark means that the product is compliant with the design, safety and performance requirements set by Synergrid. The approval can be confirmed by checking the official list of Synergrid approved luminaires on the Synergrid website.



LED module replaceable by a professional


This pictogram shows that the LED modules included in the luminaire are only replaceable by a professional. This labeling is a requirement following the introduction of European Union's Regulation on energy labelling for light sources (EU) 2019/2015.



LED driver replaceable by a professional

This pictogram shows that the LED driver included in the luminaire is only replaceable by a professional. This labeling is a requirement following the introduction of European Union's Regulation on energy labelling for light sources (EU) 2019/2015.

References

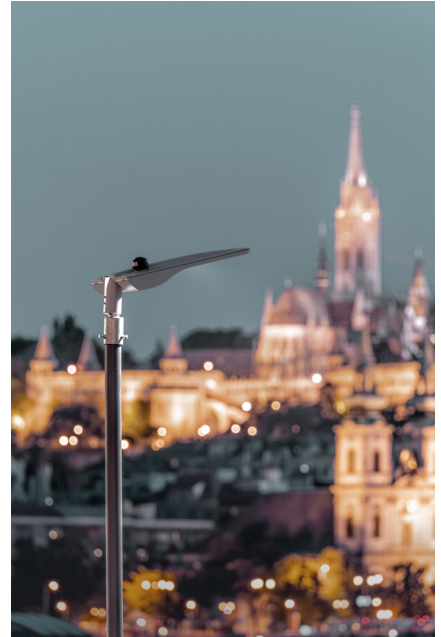

↘
Budapest,
Hungary



↘ Riga,
Latvia

vizULO

Bukultu street 11
Riga, LV – 1005, Latvia

Sales: + 371 67 383 023
Production: + 371 67 383 024

sales@vizulo.com
www.vizulo.com



VIZULO



VIZULO



VIZULOSOLUTIONS